



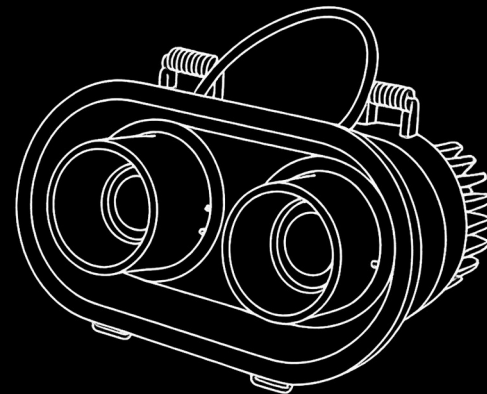


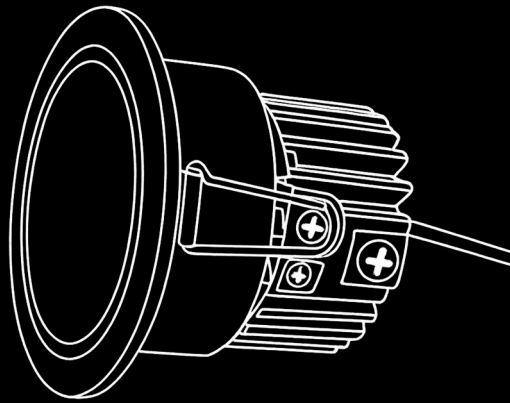

ARCHITECTURAL LIGHTING
CLIENT PRODUCT PORTFOLIO · 2026


SAY MORE WITH LIGHTS

RECESSED · LANDSCAPE · TRACK · EXTERIOR

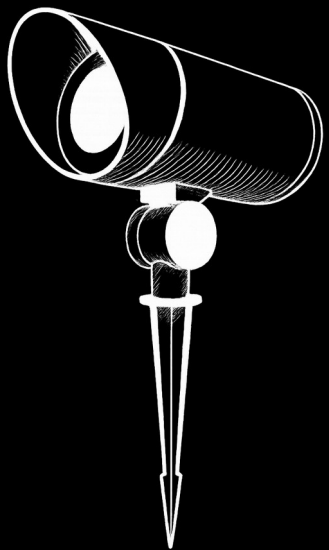

Telescopic Dual Bi-Beam

ILT-T2BDR

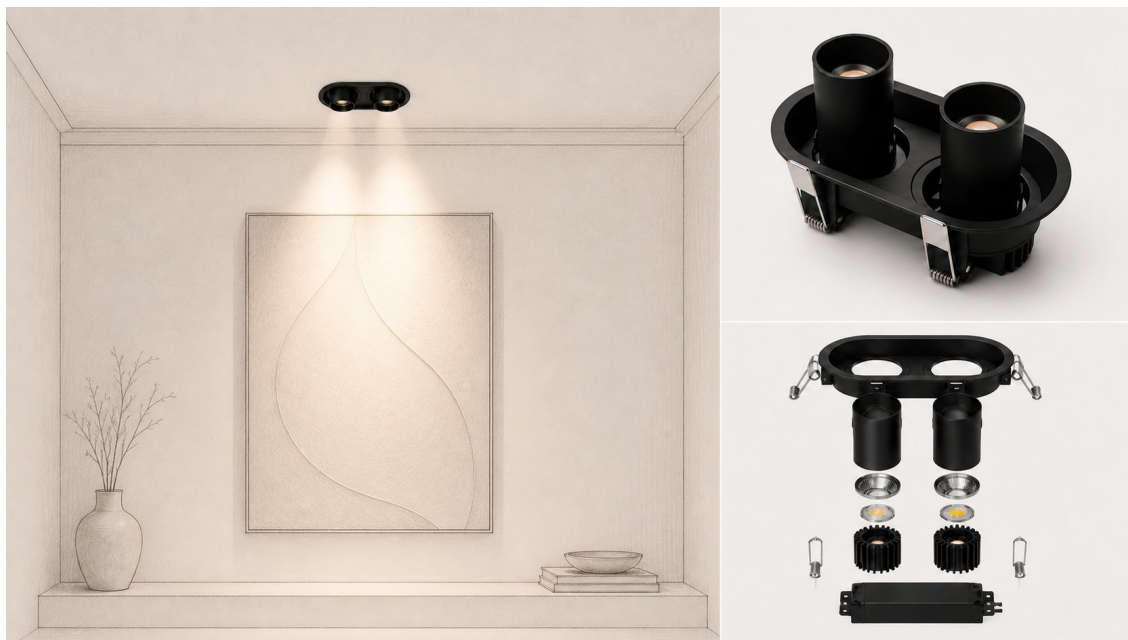

PENCIL PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

Two independently aiming heads extend, rotate and focus light from one compact recessed aperture.

VERIFIED SPECIFICATION

POWER

18W · 2 × 9W

BODY

160 × 91 mm

INPUT

120V

CUTOUT

80 × 60 mm

CCT

2700K

PROTECTION

IP65

CRI

90+

DIMMING

TRIAC · external driver

BEAM

**15° / 24° / 36° / 60° /
90°**

LIFE / WARRANTY

L70 50,000h · 2 years

Aluminum body · CE / RoHS · marine-grade finish available by specification.

Recessed Dual Bi-Beam

ILT-R2BDR



PENCIL PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

A flush dual aperture for symmetrical accent lighting, with each beam independently aimed from the ceiling plane.

VERIFIED SPECIFICATION

POWER

18W · 2 × 9W

INPUT

120V

CCT

2700K

CRI

90+

BEAM

15° / 24° / 36° / 60° / 90°

BODY

160 × 91 mm

CUTOUT

80 × 60 mm

PROTECTION

IP65

DIMMING

TRIAC · external driver

LIFE / WARRANTY

L70 50,000h · 2 years

Aluminum body · CE / RoHS · marine-grade finish available by specification.

Single Tilt S-Beam

ILT-R1BDR



PENCIL PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

One compact adjustable head for precise wall wash, artwork, millwork and focused architectural accents.

VERIFIED SPECIFICATION

POWER

9W

INPUT

120V

CCT

2700K

CRI

90+

BEAM

15° / 24° / 36° / 60° / 90°

BODY

160 × 91 mm

CUTOUT

80 × 60 mm

PROTECTION

IP65

DIMMING

TRIAC · external driver

LIFE / WARRANTY

L70 50,000h · 2 years

Aluminum body · CE / RoHS · marine-grade finish available by specification.

Trimless Fixed Beam

ILT-TR1BDR



PENCIL PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

A plaster-in trimless frame keeps the ceiling plane visually quiet while delivering a fixed architectural beam.

VERIFIED SPECIFICATION

POWER

9W

INPUT

120V

CCT

2700K

CRI

90+

BEAM

15° / 24° / 36° / 60° / 90°

BODY

160 × 91 mm

CUTOUT

80 × 60 mm

PROTECTION

IP65

DIMMING

TRIAC · external driver

LIFE / WARRANTY

L70 50,000h · 2 years

Aluminum body · CE / RoHS · marine-grade finish available by specification.

Ground Landscape Spotlight

ILT-GL1D



GARDEN PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

A compact adjustable spike light for planting, façades and landscape focal points, shown as a clean exploded product view.

VERIFIED SPECIFICATION

LAMP

GU10 · 5–8W

INPUT

120V

CCT

3000K

BEAM

24° / 36° / 60°

PROTECTION

IP65

HEAD

Ø65 × 155 mm

SPIKE

202 mm

MATERIAL

Aluminum

MOUNTING

Ground spike

FINISH

Marine-grade available

Product category corrected from the mislabeled page in Presentation 1.2.

Trimless Magnetic Track System

ILT-TRKL1D



ARCHITECTURAL PLACEMENT / SYSTEM / CONCEPTUAL INTERNAL ASSEMBLY

A low-voltage magnetic track platform with circular and linear modules for layered ambient and accent lighting.

VERIFIED SPECIFICATION

MODULE POWER

10W

INPUT

24V

CCT

3000K

BEAM

**12° / 24° / 36° / 60° /
180°**

PROTECTION

IP65

MODULES

Circular / linear

MOUNTING

Trimless track

CONTROL

Low-voltage system

FINISH

Black

USE

Ambient + accent

Final track lengths, drivers and module quantities are scheduled per project.

Glacia Linear Wall Sconce

IL-WL-L600-GD

VERIFIED PRODUCT DATA

A slim gold exterior bar with continuous warm illumination and concealed mounting.

DIMENSIONS

600 × 80 × 45 mm

POWER / CCT

15W · 3000K

PROTECTION

IP65

CONSTRUCTION

Metal + acrylic diffuser

SOURCE STATUS

Retail specification verified



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · MAIN ENTRY · PORTICO · GARAGE · COVERED EXTERIOR

Exploded view is conceptual. Final internal assembly must be confirmed with the factory before ordering.

Cylindrical Up / Down Sconce

IL-WL-CYL-UD-BK

FACTORY CONFIRMATION PENDING

A smooth matte-black cylinder producing balanced warm beams above and below.

EMISSION

Up / down

FINISH

Matte black

MOUNTING

Surface wall mount


DIMENSIONS

Factory confirmation pending

ELECTRICAL / IP

Factory confirmation pending

Exploded view is conceptual. Final internal assembly must be confirmed with the factory before ordering.

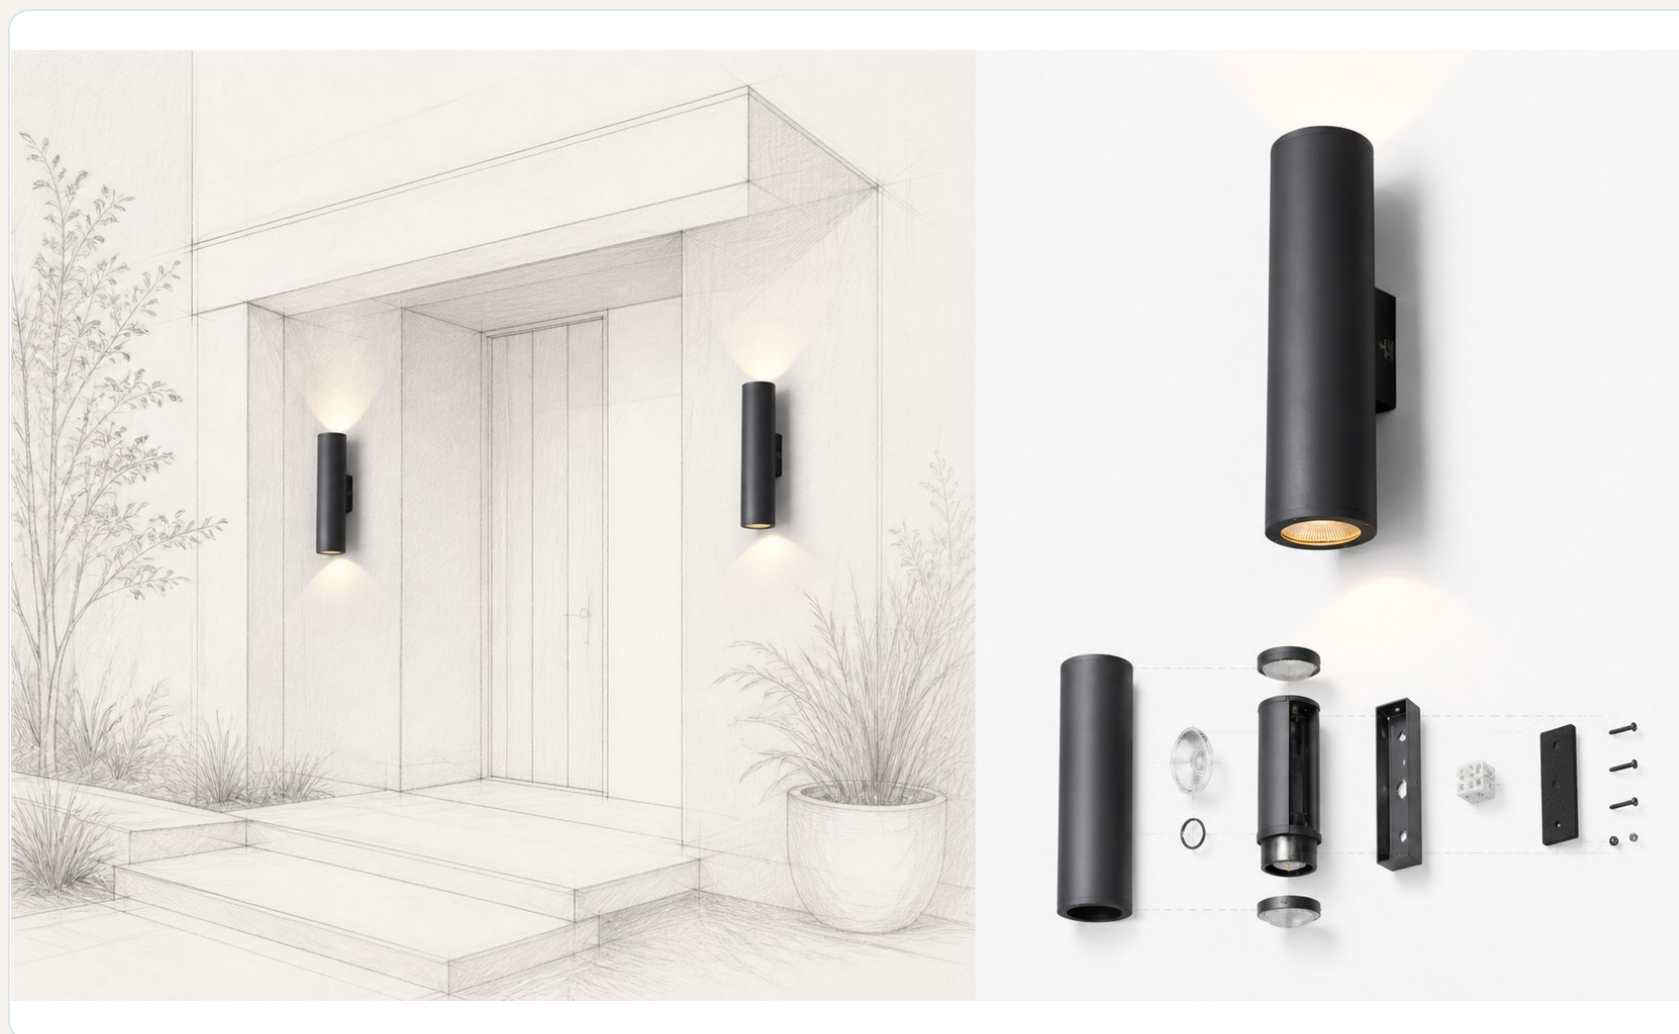

PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · ENTRY · COLUMN · CORRIDOR · EXTERIOR WALL

Ripple-Glass Exterior Lantern

IL-WL-RG32-BK

FACTORY CONFIRMATION PENDING

A tall matte-black frame with ripple glass and warm visible-lamp expression for traditional façades.

HEIGHT

813 mm · 32 in

LAMP BASE

E26

CONSTRUCTION

Black metal + ripple glass

INSTALLATION

Hardwired exterior wall

WIDTH / PROJECTION

Factory confirmation pending

Exploded view is conceptual. Final internal assembly must be confirmed with the factory before ordering.



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · FORMAL ENTRY · GARAGE · PORCH · COVERED EXTERIOR

Amber Square Lantern

IL-WL-AF12-BK

SOURCE DATA CAPTURED

A compact black-framed lantern with an amber diffuser and warm visible-lamp expression.

DIMENSIONS

12 × 5.5 × 5.75 in

LAMP BASE

E26 · bulb not included

CONSTRUCTION

Metal frame

FINISH / DIFFUSER

Matte black · amber

ELECTRICAL / IP

Not stated in source



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · ENTRY · PORCH · GARAGE · EXTERIOR WALL

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Ribbed Bidirectional Sconce

IL-WL-RIB15-UD

SOURCE DATA CAPTURED

A vertically fluted black face with integrated warm light distributed above and below.

FACE DIMENSIONS

15 × 6.25 × 1 in

POWER / INPUT

20W LED · 110–120V

CONTROL / CCT

Dimmable · 3CCT

BACKPLATE ZONE

4.72 in wide

PROJECTION / IP

Not stated in source



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · ENTRY · COLUMN · CORRIDOR · EXTERIOR WALL

The drawing shows separate 1 in body and standoff values; no overall projection is claimed.

Angular Wedge Downlight

IL-WL-WDG15-BK

SOURCE DATA CAPTURED

A tapered matte-black wedge that directs a controlled warm beam downward.

DIMENSIONS

15 × 5 × 3.1 in

POWER / INPUT

20W LED · 110–120V

CCT / CONTROL

3000K · dimmable

BACKPLATE

4.5 × 1.2 in

PROTECTION

IP rating not stated



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · WALKWAY · COLUMN · ENTRY · EXTERIOR WALL

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Linear Dual-Beam Sconce

IL-WL-LN236-BK

SOURCE DATA CAPTURED

A slim metal-and-glass vertical bar with integrated warm illumination at both ends.

DIMENSIONS

60 × 10 × 5.8 cm

IMPERIAL

23.6 × 3.93 × 2.28 in

POWER / INPUT

22W LED · 110–120V

CCT / CONTROL

3000K · dimmable

BACKPLATE / IP

19.8 cm H · IP not stated



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · TALL ENTRY · COLUMN · GARAGE · EXTERIOR WALL

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Double-Layer Vertical Sconce

IL-WL-DL21-BK

SOURCE TYPO NORMALIZED

A layered matte-black vertical form with warm light transmitted along its side edges.

DIMENSIONS

21 × 5.5 × 3 in

SOURCE CORRECTION

5.5' / 3' read as inches

LIGHT SOURCE

Integrated LED

CONTROL

Dimmable · 5–99%

POWER / CCT / IP

Not stated in source



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · ENTRY · TERRACE · COLUMN · EXTERIOR WALL

Unit glyphs were normalized by context; factory confirmation remains recommended.

Large Cylindrical Up / Down

IL-WL-C18-E26-BK

SOURCE CONFLICT FLAGGED

A tall matte-black cylinder using separate E26 lamps for strong upward and downward light.

NOMINAL SIZE

18 in H × 6 in Ø

BACKPLATE HEIGHT

4.5 in

LAMP

2 × E26 · 0–60W each

SOURCE CONFLICT

Inch/cm conversions differ

PROJECTION / IP

Unresolved · not stated

PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · TALL COLUMN · ENTRY · FACADE · EXTERIOR WALL

The source's 4.5 in callout is backplate height, not verified overall projection.

Compact Bidirectional Sconce

IL-WL-CMP9-UD

SOURCE DATA CAPTURED

A shallow black wall block with two independent LED sources and balanced up/down beams.

DIMENSIONS

9 × 6 × 1.5 in

EMISSION

Up / down

LIGHT SOURCE

2 independent LEDs

CONTROL

Dimmable · 5–99%

POWER / CCT / IP

Not stated in source



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · CORRIDOR · ENTRY · LOW WALL · EXTERIOR

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Linear Edge-Lit Sconce

IL-WL-EDGE157-BK

SOURCE DATA CAPTURED

A slim open-center black panel traced by continuous warm perimeter illumination.

DIMENSIONS

15.7 × 5.1 × 1.5 in

METRIC

40 × 13 × 4 cm

POWER / INPUT

12W · 120V

OUTPUT / CCT

960 lm · 3000K

DIMMING / IP

Not stated in source

PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · ENTRY · TERRACE · COLUMN · EXTERIOR WALL

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Faceted Triangular Sconce

IL-WL-FCT15-BK

SOURCE DATA CAPTURED

A faceted black prism that shapes opposing triangular beams above and below.

DIMENSIONS

15 × 5 × 3.5 in

POWER / INPUT

14W · 110V

OUTPUT / CCT

1080 lm · 3000K

EMISSION

Triangular up / down

DIMMING / IP

Not stated in source



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · FEATURE WALL · COLUMN · ENTRY · EXTERIOR

*Surface mount; cutout not applicable.
Exploded assembly is conceptual.*

Dark-Sky Cone Downlight

IL-WL-DSK962-BK

SOURCE DATA CAPTURED

A shielded matte-black cone that directs all warm light downward for dark-sky-conscious use.

OVERALL SIZE

9.625 in H × 9.625 in P

SHADE / BACKPLATE

6.75 in W · 4.375 in Ø

POWER / INPUT

13W LED · 110–120V

CCT / CONTROL

3000K · non-dimmable

PROTECTION

IP rating not stated



PLACEMENT / PRODUCT / CONCEPTUAL INTERNAL ASSEMBLY

APPLICATIONS · PORCH · PATH · GARDEN WALL · DARK-SKY USE

*Downlight criterion comes from the source;
no formal certification is claimed.*